

9. Hang golf bag holder to the **Widening type** rear seat safety grab bar (reference the figure 18); and then tighten the nuts of both sides of bottom golf bag fixing bracket. (reference the figure 19)



Figure 18



Figure 19

10. Attach your golf bag to the golf bag holder, reference the figure 20 and figure 21



Figure 20




Figure 21

NEW GENERATION GOLF CART BAG HOLDER INSTALLATION INSTRUCTION

Packing List

Parts List				Installation Tools	
Name	Qty	Name	Qty	Name	Qty
M8*45 Bolts	8	M6*20 Bolts	4	10mm Hex Wrench	2
M8*50 Bolts	4	M6*30 Bolts	2	13mm Hex Wrench	2
M8 Nuts	12	M6 Nuts	6		
M8 Washer	24	M6 Washer	6		

- ① base
- ② trapezoidal iron block
- ③ N-shaped bracket
- ④ L-shaped bracket
(For wider type rear seat safety grab bar only)
- ⑤ column bracket
- ⑥ bottom golf bag fixing bracket
- ⑦ upper golf bag fixing bracket

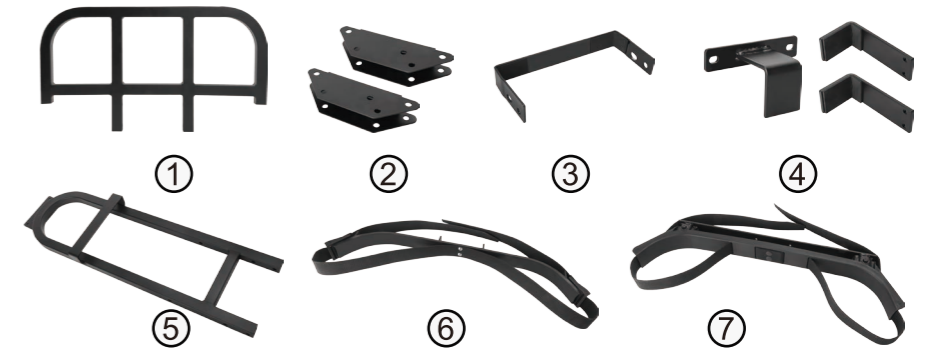

Installation Tools



3/8"(10mm) * 2



1/2"(13mm) * 2

Installation Instructions

1. Attach the trapezoidal iron block to the base, reference the figure 1 and figure 2 (Use 4 pieces M8*45 bolts and M8 nuts)



Figure 1

Figure 2

2. Insert the column bracket into the trapezoidal iron slot, reference the figure 3 (Use 2 pieces M8*45 bolts and M8 nuts)

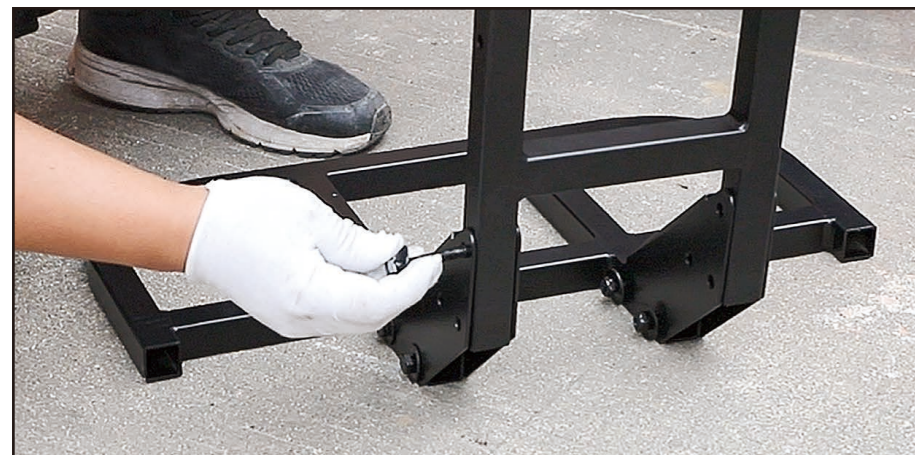


Figure 3

3. Attach the N-shaped bracket to trapezoidal iron block, reference the figure 4 and figure 5 (Use 4 pieces M8*50 bolts and M8 nuts)

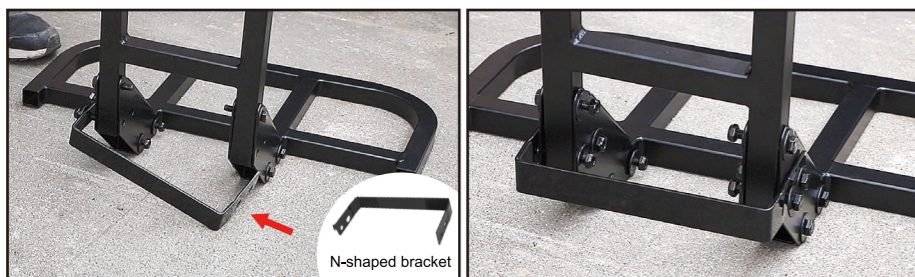


Figure 4

Figure 5

4. Attach the bottom golf bag fixing bracket to the column bracket, reference the figure 6 and figure 7 (Use 2 pieces M8*45 bolts and M8 nuts)



Figure 6

Figure 7

5. **Note:** Judge the type of the rear seat safety grab bar, Please reference figure 8 and figure 9 carefully. If your rear seat safety grab bar is widening type, need use 3 pieces L-shaped bracket. If not, no need.

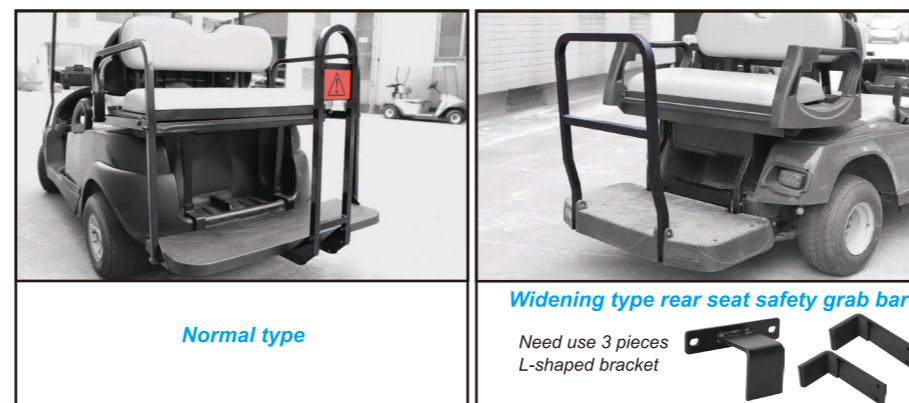


Figure 8

Figure 9

6. **Normal type rear seat safety grab bar installation**

Attach the upper golf bag fixing bracket to the column bracket, reference the figure 10 and figure 11 (Use 2 pieces M6*20 bolts and M6 nuts)



Figure 10

Figure 11

7. **Widening type rear seat safety grab bar installation**

①: Attach the upper golf bag fixing bracket and L-shaped bracket to the column bracket, reference the figure 12 and figure 13, (Use 2 pieces M6*30 bolts and M6 nuts)



Figure 12

Figure 13

②: Attach 2 pieces L-shaped bracket to the both sides of bottom golf bag fixing bracket (reference the figure 14). (Use 4 pieces M6*20 bolts and M6 nuts)

Note: DON'T tighten the nut for now and keep the 2 pieces L-shaped bracket is loose (reference the figure 15)

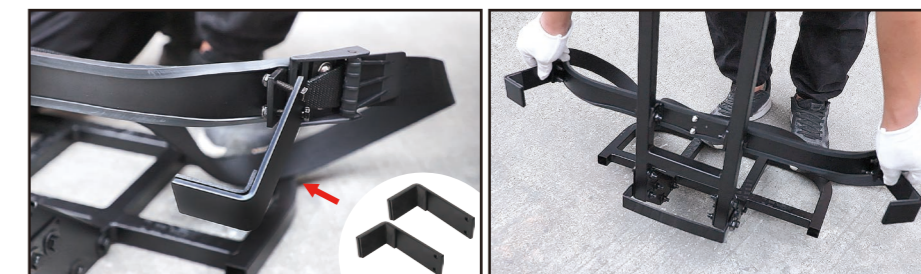


Figure 14

Figure 15

8. Hang golf bag holder to the **Normal type** rear seat safety grab bar, reference the figure 16 and figure 17



Figure 16

Figure 17